


PRODUCT SUBMITTAL - BARREL ANCHOR (CONCRETE)

The Concrete Barrel Anchor is used for anchoring brick to concrete block, poured concrete and wood stud.

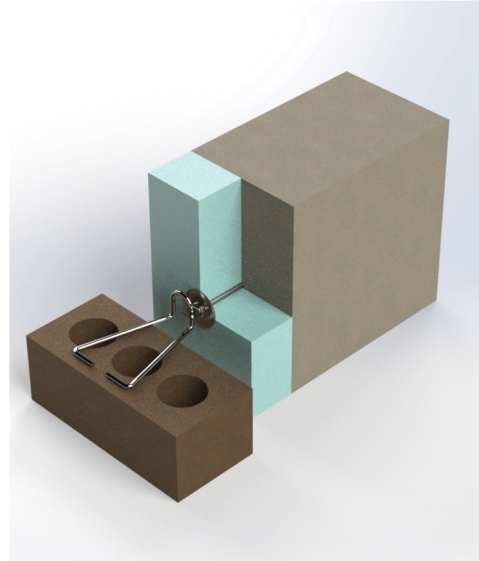

Recycled Content:

85% Post-Consumer 10% Post-Industrial

Material Conformance

The Concrete Barrel Anchor is used for anchoring brick to concrete block, poured concrete and wood stud.

Recommended Spacing is 16" O.C. and should not be installed at any time on top of insulation.

Meets TMS 402/602 & ACI / ASCE 530 Building Code Requirements and Specification for Masonry Structures

Wire: (Carbon Steel) ASTM A1064 / A1064M

Tensile Strength: 80,000 psi. - Yield Point 70,000 psi.

Hot Dip Galvanized after fabrication.

ASTM A153 / ASTM A153-B2 (1.5 oz/ft)

Structural Performance:

Capable of withstanding 100 lbs load in tension and compression without deforming or developing play in excess of .05 inch. (Test results available upon request)

Product Details

Finish: Barrel Anchor: 1000/HR Salt Spray Test

Insulation Thickness:

0" 1" 1 1/2" 2" 2 1/2" 3" 3 1/2"
4" 4 1/2"

Barrel Anchor Wire Tie: Diameter: 3/16"

Barrel Anchor Wire Tie: Hot dip galvanized

Barrel Anchor Wire Tie: Length:

3" 4" 5" 6" 7"

RESET EMAIL PRINT

NOTE

The information contained on this submittal sheet does not constitute any professional opinion or judgement and should not be used as a substitute for any architect or engineer professional determinations. Each construction project is unique and the use of these products is the responsibility of the architects, engineers and other professionals who are familiar with the specific design of the project.

Mailing Address

8528 Davis Blvd., #134-246
North Richland Hills, TX 76182
Tel#: 1-800-556-5785

3genmp.com

Warehouse Address

8550 Parkway Drive
Leeds, AL 35094
Tel#: 1-800-556-5785