


PRODUCT SUBMITTAL - DOVETAIL TRIANGLE

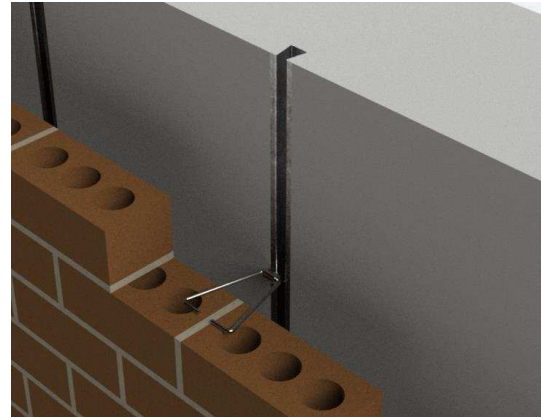

Dovetail Triangle can be installed in slot or surface mounted

Recycled Content:

Hot Dip Galvanized
85% Post-Consumer
10% Post-Industrial

MATERIAL CONFORMANCE

Dovetail triangle for use in dovetail slot or surface mounted to concrete, concrete block or brick.

Recommended Spacing is 16" O.C.

Meets TMS 402/602 & ACI / ASCE 530 Building Code

Requirements and Specification for Masonry Structures

Wire: (Carbon Steel) ASTM A1064 / A1064M

Tensile Strength: 80,000 psi. - Yield Point 70,000 psi.

Hot dip galvanized after fabrication.

ASTM A153 / ASTM A153-B2 (1.5 oz/ft)

SIZES / FINISHES

Dovetail Head: 12 ga.

Triangle Diameter: 3/16"

Dovetail Triangle Finish: Hot Dip Galvanized

Dovetail Triangle Length:

3"

4"

5"

RESET EMAIL PRINT

NOTE

The information contained on this submittal sheet does not constitute any professional opinion or judgement and should not be used as a substitute for any architect or engineer professional determinations. Each construction project is unique and the use of these products is the responsibility of the architects, engineers and other professionals who are familiar with the specific design of the project.

Mailing Address

8528 Davis Blvd., #134-246
North Richland Hills, TX 76182
Tel#: 1-800-556-5785

3genmp.com

Warehouse Address

8550 Parkway Drive
Leeds, AL 35094
Tel#: 1-800-556-5785