




# PRODUCT SUBMITTAL - BARREL ANCHOR WIRE TIE

The BAWT is used with the Barrel Anchors.

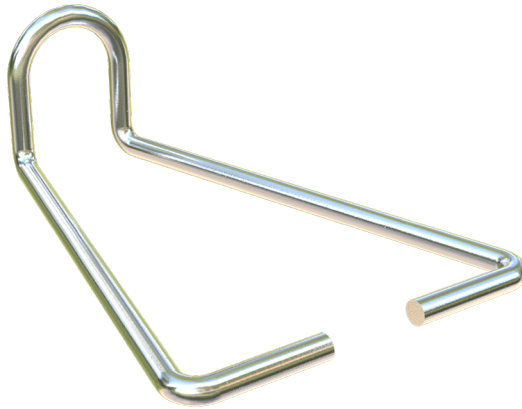

## Material Conformance

85% Post-Consumer  
10% Post-Industrial

## Material Conformance

The BAWT is used with the Barrel anchors.  
Recommended Spacing is 16" O.C., when using with the Barrel anchors  
Meets TMS 402/602 & ACI / ASCE 530 Building Code Requirements and Specification for Masonary Structures  
Wire: (Carbon Steel) ASTM A1064 / A1064M  
Tensile Strength: 80,000 psi. - Yield Point 70,000 psi  
Hot Dip Galvenized after fabrication  
ASTM A153 / ASTM AL53-82 (1.5 oz/ft)

## Product Details

BAWT Diameter: 3/16  
BAWT Finish: Hot Dip Galvanized

## BAWT Length

3"  4"  5"  6"  7"

**RESET**   **EMAIL**   **PRINT**

## NOTE

The information contained on this submittal sheet does not constitute any professional opinion or judgement and should not be used as a substitute for any architect or engineer professional determinations. Each construction project is unique and the use of these products is the responsibility of the architects, engineers and other professionals who are familiar with the specific design of the project.

**Mailing Address**  
8528 Davis Blvd., #134-246  
North Richland Hills, TX 76182  
Tel#: 1-800-556-5785

**3genmp.com**

**Warehouse Address**  
8550 Parkway Drive  
Leeds, AL 35094  
Tel#: 1-800-556-5785