




## PRODUCT SUBMITTAL - PTA PL

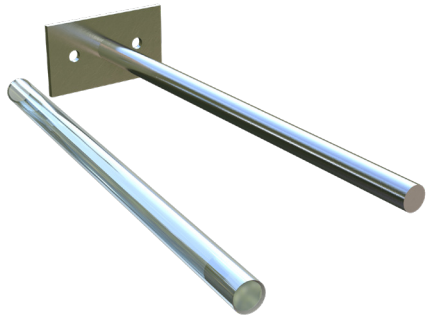

### Recycled Content:

#### Hot Dip Galvanized

85% Post-Consumer

10% Post-Industrial

### MATERIAL CONFORMANCE

Designed to provide lateral shear resistance at the top of slab masonry walls, PTA tubes with expansion filler allow vertical slab movement without transferring compressive loads to the wall below. The tube is surrounded by mortar within the joint to ensure stability.

Meets TMS 402/602 & ACI / ASCE 530 Building Code

Requirements and Specification for Masonry Structures

Sheet Metal: ASTM A1008 / A1008M

Rod: ASTM A1064/A1064M

Hot dip galvanized after fabrication.

ASTM A153 / ASTM A153-B2 (1.5 oz/ft)

### SIZES / FINISHES

PTA-PL with 3/8" x 7" Rod with Tube & Filler

Finish:  Hot Dip Galvanized

**RESET EMAIL PRINT**

### NOTE

The information contained on this submittal sheet does not constitute any professional opinion or judgement and should not be used as a substitute for any architect or engineer professional determinations. Each construction project is unique and the use of these products is the responsibility of the architects, engineers and other professionals who are familiar with the specific design of the project.

#### Mailing Address

8528 Davis Blvd., #134-246  
North Richland Hills, TX 76182  
Tel#: 1-800-556-5785

**3genmp.com**

#### Warehouse Address

8550 Parkway Drive  
Leeds, AL 35094  
Tel#: 1-800-556-5785