




# PRODUCT SUBMITTAL - BARREL ANCHOR WIRE TIE

The BAWT is used with the Barrel Anchors.

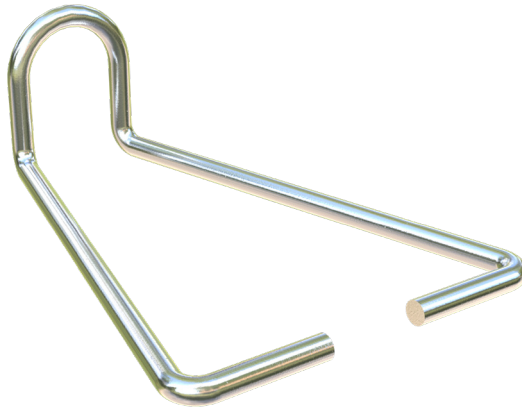

## Material Conformance

85% Post-Consumer

10% Post-Industrial

## Material Conformance

The BAWT is used with the Barrel anchors.

Recommended Spacing is 16" O.C., when using with the Barrel anchors

Meets TMS 402/602 & ACI / ASCE 530 Building Code Requirements and Specification for Masonary Structures

Wire: (Carbon Steel) ASTM A1064 / A1064M

Tensile Strength: 80,000 psi. - Yield Point 70,000 psi

Hot Dip Galvanized after fabrication

ASTM A153 / ASTM A153-82 (1.5 oz/ft)

## Product Details

BAWT Diameter: 3/16

BAWT Finish: Hot Dip Galvanized

## BAWT Length

3" ☐

4" ☐

5" ☐

6" ☐

7" ☐

**RESET**

**EMAIL**

**PRINT**

## NOTE

The information contained on this submittal sheet does not constitute any professional opinion or judgement and should not be used as a substitute for any architect or engineer professional determinations. Each construction project is unique and the use of these products is the responsibility of the architects, engineers and other professionals who are familiar with the specific design of the project.

## Mailing Address

8528 Davis Blvd., #134-246  
North Richland Hills, TX 76182  
Tel#: 1-800-556-5785

**3genmp.com**

## Warehouse Address

8550 Parkway Drive  
Leeds, AL 35094  
Tel#: 1-800-556-5785