


PRODUCT SUBMITTAL - CONTROL JOINTS

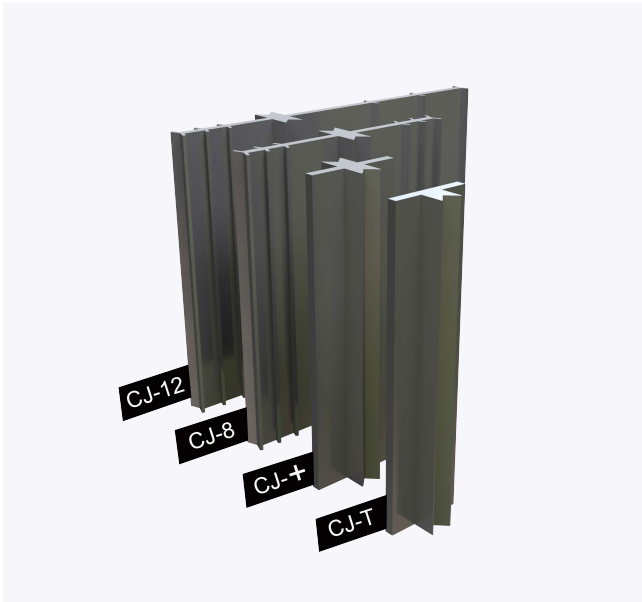

Material Conformance:

Control joints are essential for concrete block walls because they help manage and minimize the effects of shrinkage, temperature changes, and other stresses that can cause cracking in the wall.

PVC Control Joints are extruded from PVC compound grade meeting ASTM D-2287-654 specifications boasting a durometer hardness of 85±5 shore A as per ASTM D-2240 standards.

Rubber Control Joints are manufactured from a high grade of synthetic rubber compound conforming to ASTM D-2000 2AA805 with a durometer hardness of 80±5 shore A when tested in conformance with ASTM-2240.

Sizes/Finishes:

PVC	RUBBER
CJ - +	CJ - +
CJ - T	CJ - T
CJ - 8	CJ - 8
CJ - 12	CJ-12
48" long pcs.	

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.

NOTE

All information, data, and recommendations on this submittal are provided for general informational purposes only and do not constitute any warranty, guarantee, representation, or professional opinion. No reliance shall be placed on this information. Product selection, suitability, design, installation, and code compliance are the sole responsibility of the architect, engineer, design professional, and contractor. All Products are provided subject to 3GEN Masonry Products, Inc. Terms and Conditions of Sale, including all limitations, disclaimers, exclusive remedies, and indemnity obligations.

Mailing Address

8528 Davis Blvd., #134-246 North
Richland Hills, TX 76182 Tel#:
1-800-556-5785

3genmp.com

Warehouse Address

8550 Parkway Drive Leeds,
AL 35094 Tel#:
1-800-556-5785