
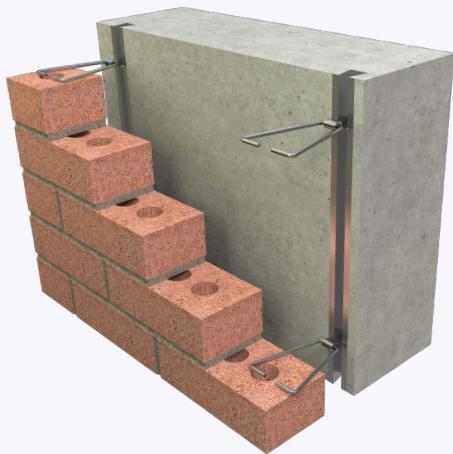


## PRODUCT SUBMITTAL - Dovetail Triangle

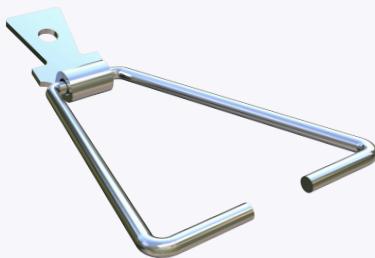

### Recycled Content:

85% Post-Consumer 10% Post-Industrial

### Material Conformance:

Dovetail triangle for use in dovetail slot or surface mounted to concrete, concrete block or brick.

Recommended Spacing is 16" O.C.

Meets TMS 402/602 & ACI / ASCE 530 Building Code

Requirements and Specification for Masonry Structures

Wire: (Carbon Steel) ASTM A1064 / A1064M

Tensile Strength: 80,000 psi. - Yield Point 70,000 psi.

Hot Dip Galvanized after fabrication.

ASTM A153 / ASTM A153-B2 (1.5 oz/ft)

### Sizes/Finishes:

Dovetail Head: 12 ga.

Triangle Diameter: 3/16"

Dovetail Triangle Finish: Hot Dip Galvanized Dovetail

Triangle Length:

3"      4"      5"

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.

### NOTE

The information contained on this submittal sheet does not constitute any professional opinion or judgement and should not be used as a substitute for any architect or engineer professional determinations. Each construction project is unique and the use of these products is the responsibility of the architects, engineers and other professionals who are familiar with the specific design of the project.

**Mailing Address**  
8528 Davis Blvd., #134-246 North  
Richland Hills, TX 76182 Tel#:  
1-800-556-5785

**3genmp.com**

**Warehouse Address**  
8550 Parkway Drive Leeds,  
AL 35094 Tel#:  
1-800-556-5785