


## PRODUCT SUBMITTAL - DRIP EDGE

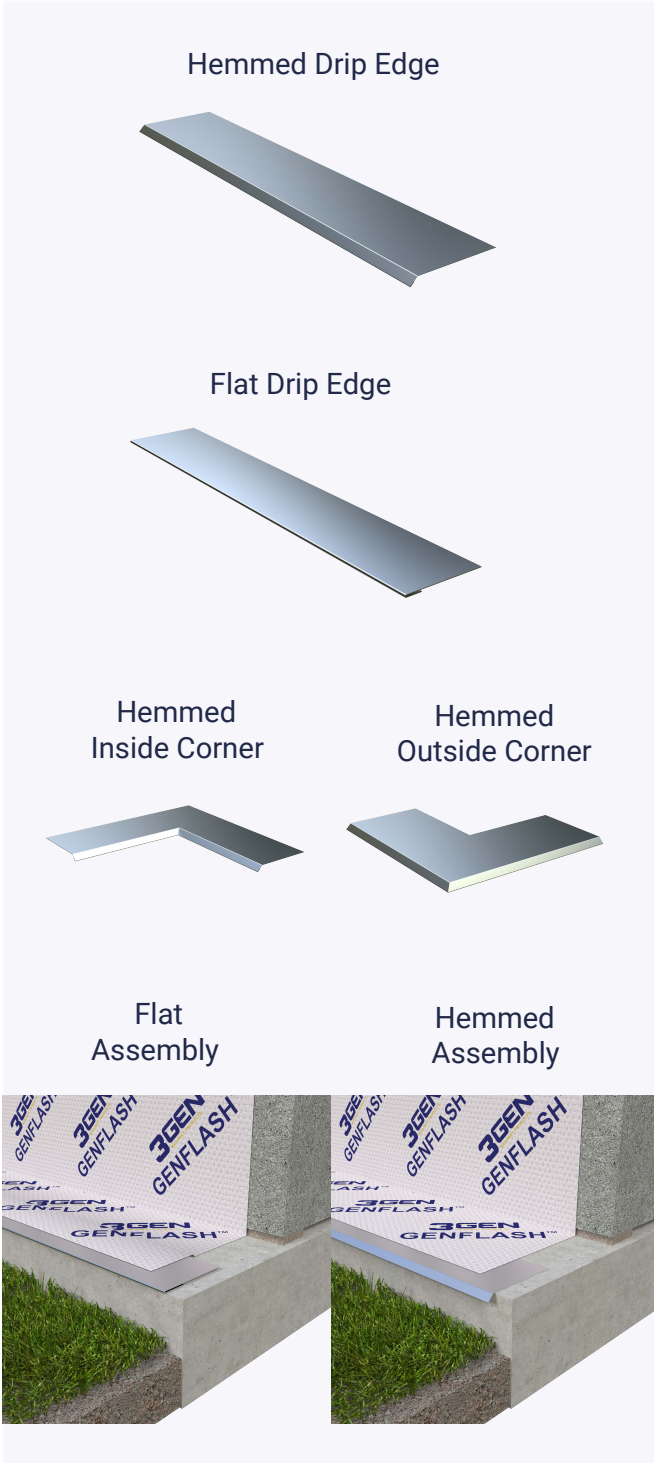

### Recycled Content:

Stainless Steel (Type 304)  
68% Post-Consumer  
18% Post-Industrial

### Material conformance:

Drip Edge is used under flashing products to help aid in channeling moisture out of the cavity wall.

Drip Edge and Drip edge Corners are designed with a (3/8") 45 Degree Hemmed Edge.

This system adheres to the seismic regulations stipulated in the Uniform Building Code.

Stainless Steel: Type 304 ASTM A240 / A240M, ASTM A480 / A480M & ASTM A666.

### Sizes/Finishes:

Drip Edge Size: 26 gauge x 8ft long.

Drip Edge Finish: Stainless Steel (Type 304) 2B / 2D Finish

Drip Edge Width: 1.5"-2" 3"

Drip Edge Option: Hemmed Flat

Drip Edge Corners 3" Wide x 8" x 8" long sections:

Outside Corner Inside Corner

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.

### NOTE

The information provided herein is for general informational purposes only and does not constitute a professional opinion or engineering judgment. It is not intended to replace the design, detailing, or project-specific determinations of the licensed architect or engineer of record.

Each project is unique. The selection, application, suitability, and proper installation of these products are the sole responsibility of the design professional and installer based on project-specific conditions, substrate, exposure, and applicable codes.

All products and information referenced herein are subject to 3GEN Masonry Products, Inc.'s Terms and Conditions of Sale, including all limitations of liability, disclaimers of warranties, and exclusive remedies, as published and in effect at the time of sale.

#### Mailing Address

8528 Davis Blvd., #134-246 North  
Richland Hills, TX 76182 Tel#:  
1-800-556-5785

[3genmp.com](http://3genmp.com)

#### Warehouse Address

8550 Parkway Drive Leeds,  
AL 35094 Tel#:  
1-800-556-5785