


PRODUCT SUBMITTAL - GENFLASH®

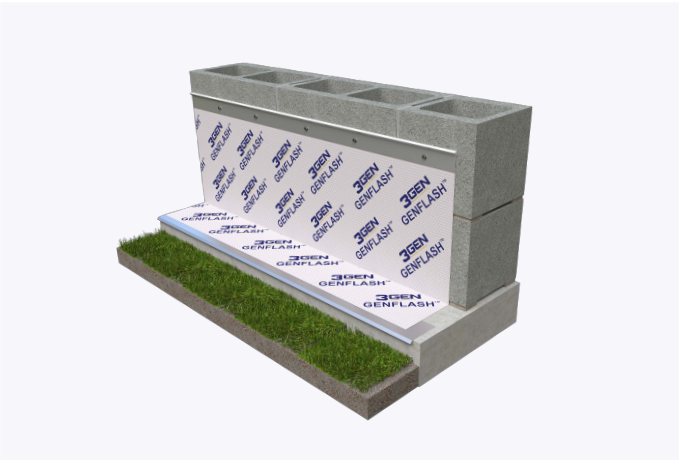

Material Conformance:

GENFLASH® Primerless is a 40-mil thick composite membrane with a custom clear adhesive. This adhesive is applied to polyethylene sheeting during manufacturing, resulting in flexible membrane perfect for various surfaces such as concrete, masonry, wood, steel, gypsum and insulation and including compatibility with insulated concrete forms (ICF)

Technical Data			
Mechanical	Typical Values	Unit	Test Method
Elongation	20	%	ASTM D412
Tensile Strength	5230	psi	ASTM D412
Low Temperature Flexibility	No Cracks	-	ASTM C765
Water Vapor Transmission	0.011	perms	ASTM D751
Water Absorption	1.48	%	ASTM E96
Mullen Burst	400	psi	ASTM D751

**Self seals around nails and screws

**Film Color (White)

**Non Asphaltic Butyl Adhesive

**No Primer Needed

**Adhesive will not drool at high temperatures

**No Voc's, HCFC's and CFC's

**UV resistant up to 120 days

Sizes/Finishes:

GENFLASH® (75 ft Long Rolls)

Widths:	4"	6"	9"	12"
	16"	18"	24"	36"

Termination Bar Finish:

Termination Bar Type:

AL

Type F

304 SS

Type L

****GENFLASH® requires the use of Termination Bars****

Drip Edge Type 304 SS Width:

1 1/2" 3"

Drip Edge Type 304 SS Corners

GENFLASH Type 304 SS
Corners & End Dams

3" Outside Corner
3" Inside Corner

Outside Corner
Inside Corner
End Dam

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer

NOTE

All information, data, and recommendations on this submittal are provided for general informational purposes only and do not constitute any warranty, guarantee, representation, or professional opinion. No reliance shall be placed on this information. Product selection, suitability, design, installation, and code compliance are the sole responsibility of the architect, engineer, design professional, and contractor. All Products are provided subject to 3GEN Masonry Products, Inc. Terms and Conditions of Sale, including all limitations, disclaimers, exclusive remedies, and indemnity obligations.

Mailing Address

8528 Davis Blvd., #134-246 North
Richland Hills, TX 76182 Tel#:
1-800-556-5785

3genmp.com

Warehouse Address

8550 Parkway Drive Leeds,
AL 35094 Tel#:
1-800-556-5785