


PRODUCT SUBMITTAL - GENFLASH®

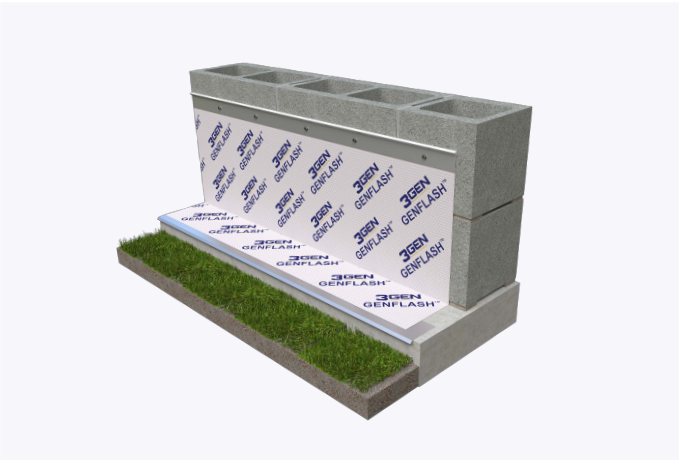

Material Conformance:

GENFLASH® Primerless is a 40-mil thick composite membrane with a custom clear adhesive. This adhesive is applied to polyethylene sheeting during manufacturing, resulting in flexible membrane perfect for various surfaces such as concrete, masonry, wood, steel, gypsum and insulation and including compatibility with insulated concrete forms (ICF)

Technical Data			
Mechanical	Typical Values	Unit	Test Method
Elongation	20	%	ASTM D412
Tensile Strength	5230	psi	ASTM D412
Low Temperature Flexibility	No Cracks	-	ASTM C765
Water Vapor Transmission	0.011	perms	ASTM D751
Water Absorption	1.48	%	ASTM E96
Mullen Burst	400	psi	ASTM D751

**Self seals around nails and screws

**Film Color (White)

**Non Asphaltic Butyl Adhesive

**No Primer Needed

**Adhesive will not drool at high temperatures

**No Voc's, HCFC's and CFC's

**UV resistant up to 120 days

Sizes/Finishes:

GENFLASH® (75 ft Long Rolls)

Widths:	4"	6"	9"	12"
	16"	18"	24"	36"

Termination Bar Finish:

Termination Bar Type:

AL

Type F

304 SS

Type L

****GENFLASH® requires the use of Termination Bars****

Drip Edge Type 304 SS Width:

1 1/2" 3"

Drip Edge Type 304 SS Corners

GENFLASH Type 304 SS
Corners & End Dams

3" Outside Corner

Outside Corner

3" Inside Corner

Inside Corner

End Dam

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer

NOTE

The information provided herein is for general informational purposes only and does not constitute a professional opinion or engineering judgment. It is not intended to replace the design, detailing, or project-specific determinations of the licensed architect or engineer of record. Each project is unique. The selection, application, suitability, and proper installation of these products are the sole responsibility of the design professional and installer based on project-specific conditions, substrate, exposure, and applicable codes.

All products and information referenced herein are subject to 3GEN Masonry Products, Inc.'s Terms and Conditions of Sale, including all limitations of liability, disclaimers of warranties, and exclusive remedies, as published and in effect at the time of sale.

Mailing Address

8528 Davis Blvd., #134-246 North
Richland Hills, TX 76182 Tel#:
1-800-556-5785

3genmp.com

Warehouse Address

8550 Parkway Drive Leeds,
AL 35094 Tel#:
1-800-556-5785