PRODUCT SUBMITTAL - GENFLASH®

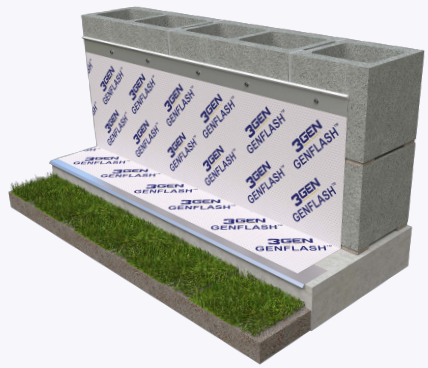

Technical Data			
Mechanical	**Typical Values**	**Unit**	**Test Method**
Elongation	20	%	ASTM D412
Tensile Strength	5230	psi	ASTM D412
Low TemperatureFlexibility	No Cracks	-	ASTM C765
Water Vapor Transmission	0.011	perms	ASTM D751
Water Absorption	1.48	%	ASTM E96
Mullen Burst	400	psi	ASTM D751

**Self seals around nails and screws
**Non Asphaltic Butyl Adhesive
**Adhesive will not drool at high temperatures
**UV resistant up to 120 days
**Film Color (White)
**No Primer Needed
**No Voc's, HFCC's and CFC's

Sizes/Finishes:

GENFLASH® (75 ft Long Rolls)

Widths: ☐ 4" ☐ 6" ☐ 9" ☐ 12" ☐ 16" ☐ 18" ☐ 24" ☐ 36"

Termination Bar Finish:
- ☐ AL
- ☐ 304 SS

Termination Bar Type:
- ☐ Type F
- ☐ Type L

GENFLASH® requires the use of Termination Bars

Drip Edge Type 304 SS Width:
☐ 1 1/2" ☐ 3"

Drip Edge Type 304 SS Corners
- ☐ 3" Outside Corner
- ☐ 3" Inside Corner

GENFLASH Type 304 SS Corners & End Dams
- ☐ Outside Corner
- ☐ Inside Corner
- ☐ End Dam

Reset | Print | Email

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer

Material Conformance:

GENFLASH® Primerless is a 40-mil thick composite membrane with a custom clear adhesive. This adhesive is applied to polyethylene sheeting during manufacturing, resulting in flexible membrane perfect for various surfaces such as concrete, masonry, wood, steel, gypsum and insulation and including compatibility with insulated concrete forms (ICF)

NOTE

The information provided herein is for general informational purposes only and does not constitute a professional opinion or engineering judgment. It is not intended to replace the design, detailing, or project-specific determinations of the licensed architect or engineer of record.
Each project is unique. The selection, application, suitability, and proper installation of these products are the sole responsibility of the design professional and installer based on project-specific conditions, substrate, exposure, and applicable codes.
All products and information referenced herein are subject to 3GEN Masonry Products, Inc.'s Terms and Conditions of Sale, including all limitations of liability, disclaimers of warranties, and exclusive remedies, as published and in effect at the time of sale.

Mailing Address
8528 Davis Blvd., #134-246 North
Richland Hills, TX 76182 Tel#:
1-800-556-5785

3genmp.com

Warehouse Address
8620 Spruiell Street NE,
Leeds, AL 35094 Tel#:
1-800-556-5785