


# PRODUCT SUBMITTAL - GENFLASH COPPER

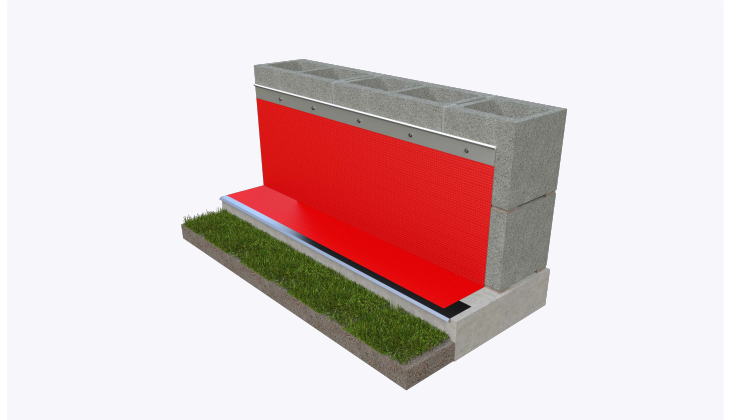

## Recycled Content:

90% Recycled Content

## Material Conformance:

GENFLASH® COPPER Fabric Flashing (non-asphaltic) consists of a single, solid sheet of copper bonded on both sides to layers of polymeric fabric.

This innovative product boasts exceptional puncture and tear resistance, engineered for enduring performance throughout the wall's lifespan.

High puncture resistance

Mold resistant: passes ASTM D3273

Fire resistant: passes ASTM E84, Class A

Life of the wall warranty

Compatible with:

Insulation

Spray Polyurethane Foam,

Air barriers

Construction sealants

## Sizes/Finishes:

GENFLASH® COPPER (25ft Long Rolls)

Widths: 12" 18" 24" 36"

Thickness: 3oz 5oz 7oz

Termination Bar Finish:

AL

304 SS

Termination Bar Type:

Type F

Type L

**\*\*GENFLASH® COPPER requires the use of a Termination Bar\*\***

Drip Edge Type 304 SS Width:

3"

Drip Edge Type 304 SS

Corners:

3" Outside Corner

3" Inside Corner

GENFLASH® Type 304

SS Corners & End Dams:

Outside Corner

Inside Corner

End Dam

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.

## NOTE

All information, data, and recommendations on this submittal are provided for general informational purposes only and do not constitute any warranty, guarantee, representation, or professional opinion. No reliance shall be placed on this information. Product selection, suitability, design, installation, and code compliance are the sole responsibility of the architect, engineer, design professional, and contractor. All Products are provided subject to 3GEN Masonry Products, Inc. Terms and Conditions of Sale, including all limitations, disclaimers, exclusive remedies, and indemnity obligations.

### Mailing Address

8528 Davis Blvd., #134-246 North  
Richland Hills, TX 76182 Tel#:  
1-800-556-5785

**3genmp.com**

### Warehouse Address

8550 Parkway Drive Leeds,  
AL 35094 Tel#:  
1-800-556-5785