


PRODUCT SUBMITTAL - GENFLASH® SS

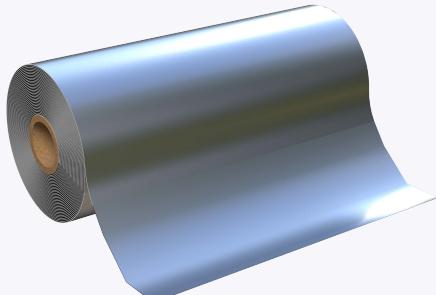

Recycled Content:

Stainless Steel (Type 304)

60% Post-Consumer

Material Conformance:

GENFLASH™® SS is a stainless steel fabric flashing, categorized as Class A material, comprising a layer of polymeric fabric bonded with a single sheet of 304 stainless steel on one side.

This innovative product boasts exceptional puncture and tear resistance, engineered for enduring performance throughout the wall's lifespan.

High puncture resistance

Mold resistant: passes ASTM D3273

Fire resistant: passes ASTM E84, Class A

Life of the wall warranty

Compatible with:

Insulation

Spray Polyurethane Foam

Air barriers

Construction sealants

Thickness 2 mils stainless steel, 10 mils overall thickness

Stainless Steel: Type 304 ASTM A240 / A240M,

ASTM A480 / A480M & ASTM A666.

Sizes/Finishes:

GENFLASH® 304 SS (60 ft Long Rolls)

Widths: 12" 18" 24" 36"

Termination Bar Finish:

AL
304 SS

Termination Bar Type:

Type F
Type L

****GENFLASH® SS requires the use of Termination Bars****

Drip Edge Type 304 SS Width:

1 1/2" 3"

Drip Edge Type 304 SS
Corners:

3" Outside Corner
3" Inside Corner

Type 304 SS Corners &
End Dams:

Outside Corner
Inside Corner
End Dam

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer

NOTE

The information contained on this submittal sheet does not constitute any professional opinion or judgement and should not be used as a substitute for any architect or engineer professional determinations. Each construction project is unique and the use of these products is the responsibility of the architects, engineers and other professionals who are familiar with the specific design of the project.

Mailing Address
8528 Davis Blvd., #134-246 North
Richland Hills, TX 76182 Tel#:
1-800-556-5785

3genmp.com

Warehouse Address
8550 Parkway Drive Leeds,
AL 35094 Tel#:
1-800-556-5785