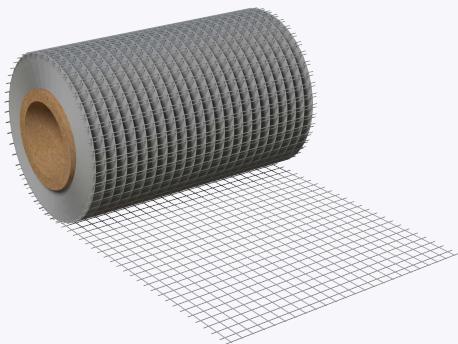


PRODUCT SUBMITTAL - GROUT SCREEN

**Features:**

Prevents grout from falling through block cores while directing grout flow to areas requiring reinforced concrete block.

Improves masonry anchor bonding in hollow block construction. Constructed from durable, non-corrosive 1/4" square polypropylene monofilament mesh, offering high tensile and burst strength without interfering with the mortar bond.

Technical Data:

Polypropylene mesh tested according to ASTM D5034 standards.

Sizes/Finishes:

Grout Screen 100ft Long Rolls:

- 4" Wide
- 6" Wide
- 8" Wide
- 10" Wide

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.

NOTE

The information contained on this submittal sheet does not constitute any professional opinion or judgement and should not be used as a substitute for any architect or engineer professional determinations. Each construction project is unique and the use of these products is the responsibility of the architects, engineers and other professionals who are familiar with the specific design of the project.

Mailing Address
8528 Davis Blvd., #134-246 North
Richland Hills, TX 76182 Tel#:
1-800-556-5785

3genmp.com

Warehouse Address
8550 Parkway Drive Leeds,
AL 35094 Tel#:
1-800-556-5785