


PRODUCT PRODUCT SUBMITTAL - GROUT SCREEN

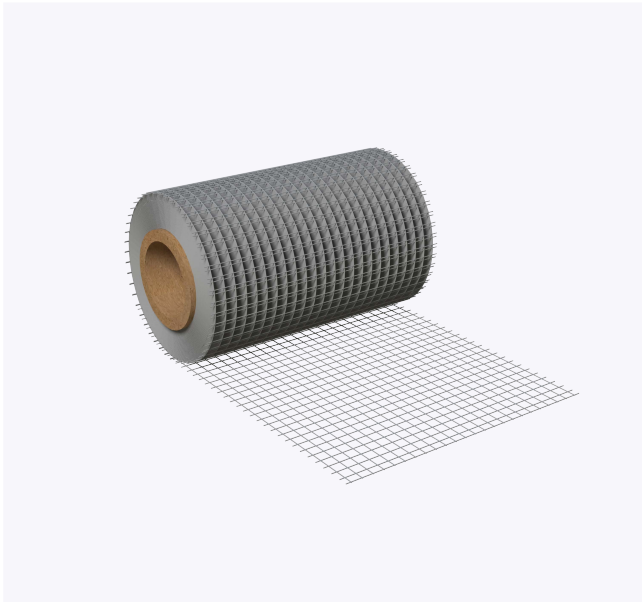

Features:

Prevents grout from falling through block cores while directing grout flow to areas requiring reinforced concrete block.

Improves masonry anchor bonding in hollow block construction. Constructed from durable, non-corrosive 1/4" square polypropylene monofilament mesh, offering high tensile and burst strength without interfering with the mortar bond.

Technical Data:

Polypropylene mesh tested according to ASTM D5034 standards.

Sizes/Finishes:

Grout Screen 100ft Long Rolls:

- 4" Wide
- 6" Wide
- 8" Wide
- 10" Wide

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.

NOTE

All information, data, and recommendations on this submittal are provided for general informational purposes only and do not constitute any warranty, guarantee, representation, or professional opinion. No reliance shall be placed on this information. Product selection, suitability, design, installation, and code compliance are the sole responsibility of the architect, engineer, design professional, and contractor. All Products are provided subject to 3GEN Masonry Products, Inc. Terms and Conditions of Sale, including all limitations, disclaimers, exclusive remedies, and indemnity obligations.

Mailing Address

8528 Davis Blvd., #134-246 North
Richland Hills, TX 76182 Tel#:
1-800-556-5785

3genmp.com

Warehouse Address

8550 Parkway Drive Leeds,
AL 35094 Tel#:
1-800-556-5785