


## PRODUCT PRODUCT SUBMITTAL - GROUT SCREEN

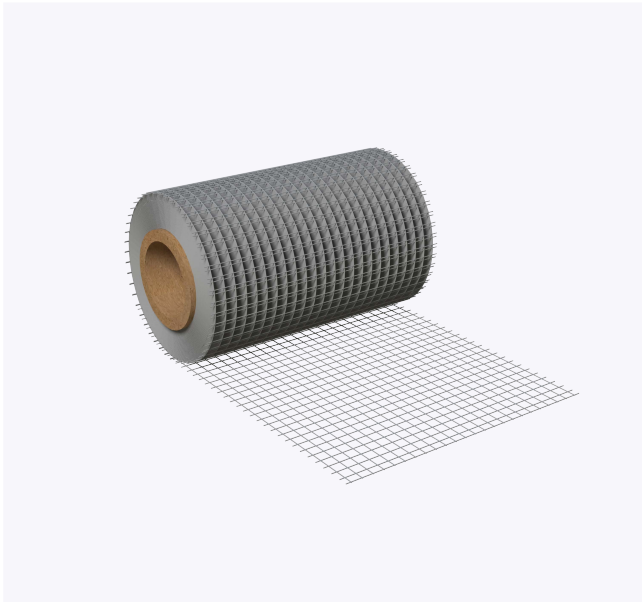

### Features:

Prevents grout from falling through block cores while directing grout flow to areas requiring reinforced concrete block.

Improves masonry anchor bonding in hollow block construction. Constructed from durable, non-corrosive 1/4" square polypropylene monofilament mesh, offering high tensile and burst strength without interfering with the mortar bond.

### Technical Data:

Polypropylene mesh tested according to ASTM D5034 standards.



### Sizes/Finishes:

Grout Screen 100ft Long Rolls:

- 4" Wide
- 6" Wide
- 8" Wide
- 10" Wide

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.

### NOTE

The information provided herein is for general informational purposes only and does not constitute a professional opinion or engineering judgment. It is not intended to replace the design, detailing, or project-specific determinations of the licensed architect or engineer of record.

Each project is unique. The selection, application, suitability, and proper installation of these products are the sole responsibility of the design professional and installer based on project-specific conditions, substrate, exposure, and applicable codes.

All products and information referenced herein are subject to 3GEN Masonry Products, Inc.'s Terms and Conditions of Sale, including all limitations of liability, disclaimers of warranties, and exclusive remedies, as published and in effect at the time of sale.

#### Mailing Address

8528 Davis Blvd., #134-246 North  
Richland Hills, TX 76182 Tel#:  
1-800-556-5785

**3genmp.com**

#### Warehouse Address

8550 Parkway Drive Leeds,  
AL 35094 Tel#:  
1-800-556-5785