
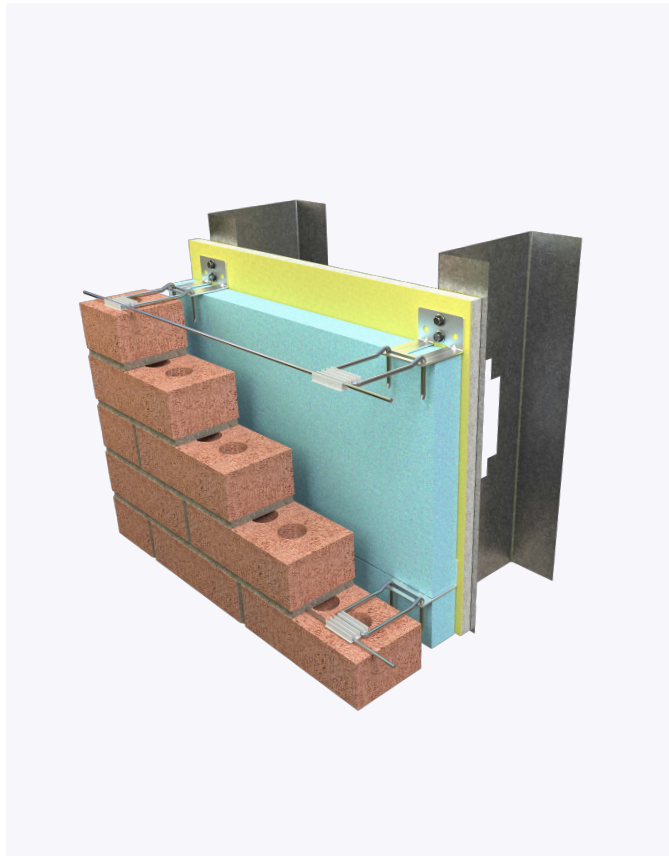


# PRODUCT SUBMITTAL - H-13-H Seismic Plastic Clip

The H-13-H Seismic Plastic Clip is used for anchoring brick to metal stud, wood stud, concrete block or poured concrete.

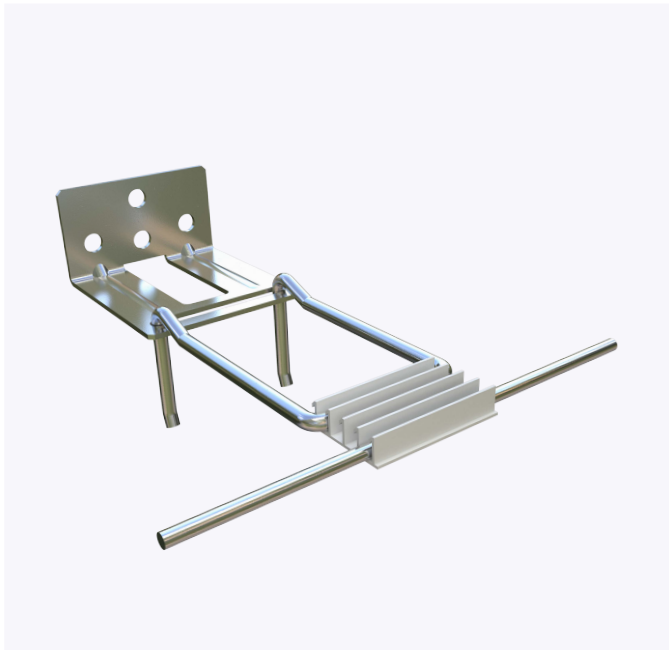

## Recycled Content:

85% Post-Consumer  
10% Post-Industrial

## Material Conformance:

The H-13-H Seismic Plastic Clip's multifunctional design allows for horizontal installation with a hook or vertical installation with a triangle.

The H-13-H Seismic Plastic Clip is used for anchoring brick to metal stud, wood stud, concrete block or poured concrete.

H-13-H H Seismic Plastic Clip can be used with rigid or spray foam insulation. Recommended Spacing is 16" O.C.

Meets TMS 402/602 & ACI / ASCE 530 Building Code Requirements and Specification for Masonry Structures

Sheet Metal: ASTM A1008 / A1008M

Wire: (Carbon Steel) ASTM A1064 / A1064M

Tensile Strength: 80,000 psi. - Yield Point 70,000 psi.

Hot dip galvanized after fabrication.

ASTM A153 / ASTM A153-B2 (1.5 oz/ft)

## Structural Performance:

Capable of withstanding 100 lbs load in tension and compression without deforming or developing play in excess of .05 inch. (Test results available upon request)

## Sizes/Finishes:

H-13 Finish: Hot Dip Galvanized 304 Stainless Steel

H-13 Material Thickness: 14 Gauge

Hook Diameter: 3/16"

Hook Finish: Hot Dip Galvanized 304 Stainless Steel

Insulation Thickness:

0"	1"	1 1/2"	2"	2 1/2"
3"	3 1/2"	4"	4 1/2"	

Hook (Pintle) Length:

3"	4"	5"	6"	7"
----	----	----	----	----

Seismic Plastic Clip

Seismic Wire Hot Dip Galvanized: 9 GA. 3/16"

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.

## NOTE

All information, data, and recommendations on this submittal are provided for general informational purposes only and do not constitute any warranty, guarantee, representation, or professional opinion. No reliance shall be placed on this information. Product selection, suitability, design, installation, and code compliance are the sole responsibility of the architect, engineer, design professional, and contractor. All Products are provided subject to 3GEN Masonry Products, Inc. Terms and Conditions of Sale, including all limitations, disclaimers, exclusive remedies, and indemnity obligations.

### Mailing Address

8528 Davis Blvd., #134-246 North  
Richland Hills, TX 76182 Tel#:  
1-800-556-5785

**3genmp.com**

### Warehouse Address

8550 Parkway Drive Leeds,  
AL 35094 Tel#:  
1-800-556-5785