
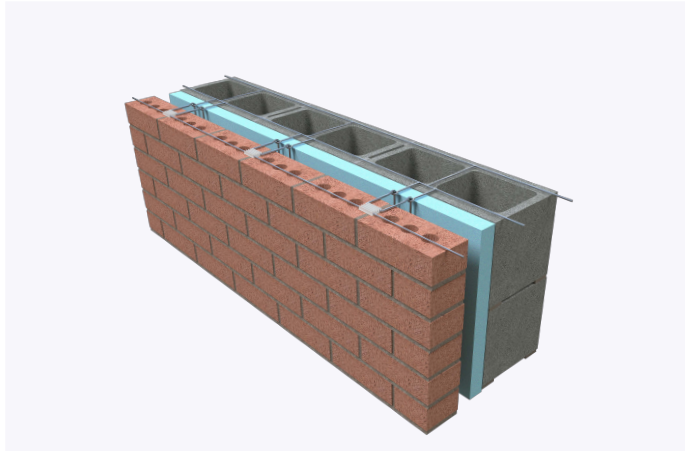


PRODUCT SUBMITTAL - Ladder Eye Seismic Plastic Clip

Ladder Eye Seismic Plastic Clip is designed for embedment in the horizontal mortar joints of concrete masonry units.

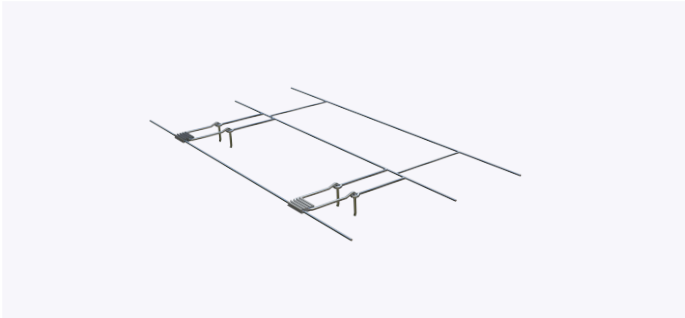

Material Conformance:

Ladder Eye Seismic Plastic Clip is designed for embedment in the horizontal mortar joints of concrete masonry unit.

ASTM A951/A951M (Standard Specification for Steel Wire for Masonry Joint Reinforcing.

Meets TMS 402/602 & ACI / ASCE 530 Building Code Requirements and Specification for Masonry Structures

Wire: (Carbon Steel) ASTM A1064 / A1064M

Tensile Strength: 80,000 psi. - Yield Point 70,000 psi.

Hot Dip Galvanized after fabrication.

ASTM A153 / ASTM A153-B2 (1.5 oz/ft²)

Stainless Steel: ASTM 580 / ASTM 580M – Type 304 or 316

Recycled Content:

Hot Dip Galvanized	Stainless Steel Type 304/316
85% Post-Consumer	68% Post-Consumer
10% Post-Industrial	18% Pre-Consumer

Product Details:

Capable of withstanding 100 lbs load in tension and compression without deforming or developing play in excess of .05 inch. (Test results available upon request)

Sizes/Finishes:

Finishes:				
Hot Dip Galvanized		304 Stainless Steel		
316 Stainless Steel is available on special order				
Wire Size:		Side Rods	Cross Rods	
Standard		9 Gauge (.148")	9 Gauge (.148")	
Heavy Duty		3/16" (.187")	9 Gauge (.148")	
Extra Heavy Duty		3/16" (.187")	33/16" (.187")	
CMU / Block SizeHook Finish: Hot Dip Galvanized				
4"	6"	8"	10"	12"
Insulation Thickness:		0"	1"	1 1/2"
2"	2 1/2"	3"	3 1/2"	4"
Hook Length:				
3"	4"	5"	6"	7"
Seismic Plastic Clip				
Seismic Wire Hot Dip Galvanized:		9 GA.	3/16"	

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.

NOTE

The information provided herein is for general informational purposes only and does not constitute a professional opinion or engineering judgment. It is not intended to replace the design, detailing, or project-specific determinations of the licensed architect or engineer of record. Each project is unique. The selection, application, suitability, and proper installation of these products are the sole responsibility of the design professional and installer based on project-specific conditions, substrate, exposure, and applicable codes.

All products and information referenced herein are subject to 3GEN Masonry Products, Inc.'s Terms and Conditions of Sale, including all limitations of liability, disclaimers of warranties, and exclusive remedies, as published and in effect at the time of sale.

Mailing Address

8528 Davis Blvd., #134-246 North
 Richland Hills, TX 76182 Tel#:
 1-800-556-5785

3genmp.com

Warehouse Address

8550 Parkway Drive Leeds,
 AL 35094 Tel#:
 1-800-556-5785