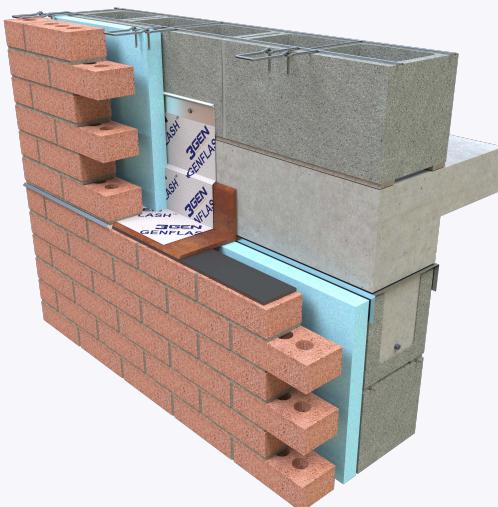
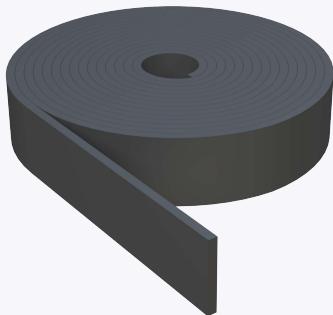


PRODUCT SUBMITTAL -

NEOPRENE EXPANSION JOINT

**Material Conformance:**

Closed-cell Neoprene is durable and water-resistant. It can handle up to 50% compression, and is manufactured to meet ASTM D 1056, RE41 Grade 2A1.

Physical Properties:

| | Typical Value: |
|----------------------|---|
| Density | 3 to 10 pounds per cubic foot (PCF) |
| Compression Set | Up to 50% compression recovery |
| Tensile Strength | Greater than 150 psi |
| Elongation at Break | 100% to 400% |
| Temperature Range | -40°F to 200°F (-40°C to 93°C) |
| Water Absorption | Less than 5% by weight |
| Shore Hardness | 20-30 Shore A |
| Thermal Conductivity | Low (Good insulation properties) |
| Chemical Resistance | Resistant to oils, chemicals, and ozone |

Neoprene Expansion Joint:

3/8" X 3" X 50 FT Long

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.

NOTE

The information contained on this submittal sheet does not constitute any professional opinion or judgement and should not be used as a substitute for any architect or engineer professional determinations. Each construction project is unique and the use of these products is the responsibility of the architects, engineers and other professionals who are familiar with the specific design of the project.

Mailing Address
8528 Davis Blvd., #134-246 North
Richland Hills, TX 76182 Tel#:
1-800-556-5785

3genmp.com

Warehouse Address
8550 Parkway Drive Leeds,
AL 35094 Tel#:
1-800-556-5785