
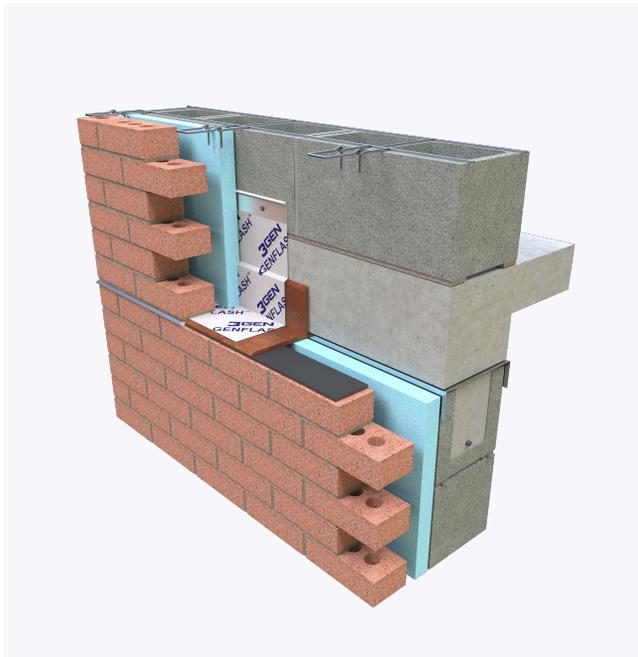


# PRODUCT SUBMITTAL - NEOPRENE EXPANSION JOINT

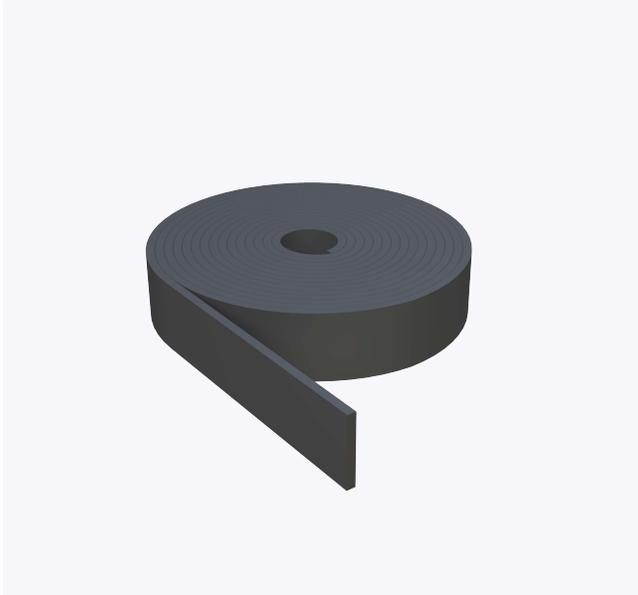

## Material Conformance:

Closed-cell Neoprene is durable and water-resistant. It can handle up to 50% compression, and is manufactured to meet ASTM D 1056, RE41 Grade 2A1.

## Physical Properties:

Density  
Compression Set  
Tensile Strength  
Elongation at Break  
Temperature Range  
Water Absorption  
Shore Hardness  
Thermal Conductivity  
Chemical Resistance

## Typical Value:

3 to 10 pounds per cubic foot (PCF)  
Up to 50% compression recovery  
Greater than 150 psi  
100% to 400%  
-40°F to 200°F (-40°C to 93°C)  
Less than 5% by weight  
20-30 Shore A  
Low (Good insulation properties)  
Resistant to oils, chemicals, and ozone

## Neoprene Expansion Joint:

3/8" X 3" X 50 FT Long

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.

## NOTE

All information, data, and recommendations on this submittal are provided for general informational purposes only and do not constitute any warranty, guarantee, representation, or professional opinion. No reliance shall be placed on this information. Product selection, suitability, design, installation, and code compliance are the sole responsibility of the architect, engineer, design professional, and contractor. All Products are provided subject to 3GEN Masonry Products, Inc. Terms and Conditions of Sale, including all limitations, disclaimers, exclusive remedies, and indemnity obligations.

### Mailing Address

8528 Davis Blvd., #134-246 North  
Richland Hills, TX 76182 Tel#:  
1-800-556-5785

[3genmp.com](http://3genmp.com)

### Warehouse Address

8550 Parkway Drive Leeds,  
AL 35094 Tel#:  
1-800-556-5785