


PRODUCT SUBMITTAL - PTA DOVETAIL

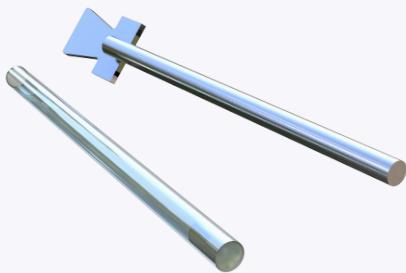

Recycled Content:

Hot Dip Galvanized

85% Post-Consumer 10% Post-Industrial

Material Conformance:

Designed to provide lateral shear resistance at the top of slab masonry walls, PTA tubes with expansion filler allow vertical slab movement without transferring compressive loads to the wall below. The tube is surrounded by mortar within the joint to ensure stability.

For Use in Dovetail Slot

Meets TMS 402/602 & ACI / ASCE 530 Building Code Requirements and Specification for Masonry Structures

Sheet Metal: ASTM A1008 / A1008M

Rod: ASTM A1064/A1064M

Hot dip galvanized after fabrication.

ASTM A153 / ASTM A153-B2 (1.5 oz/ft)

Sizes/Finishes:

PTA-DT with 3/8" x 7" Rod with Tube &

Filler

Hot Dip Galvanized

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.



NOTE

The information contained on this submittal sheet does not constitute any professional opinion or judgement and should not be used as a substitute for any architect or engineer professional determinations. Each construction project is unique and the use of these products is the responsibility of the architects, engineers and other professionals who are familiar with the specific design of the project.

Mailing Address
8528 Davis Blvd., #134-246 North
Richland Hills, TX 76182 Tel#:
1-800-556-5785

3genmp.com

Warehouse Address
8550 Parkway Drive Leeds,
AL 35094 Tel#:
1-800-556-5785