


## PRODUCT SUBMITTAL - PTA DOVETAIL

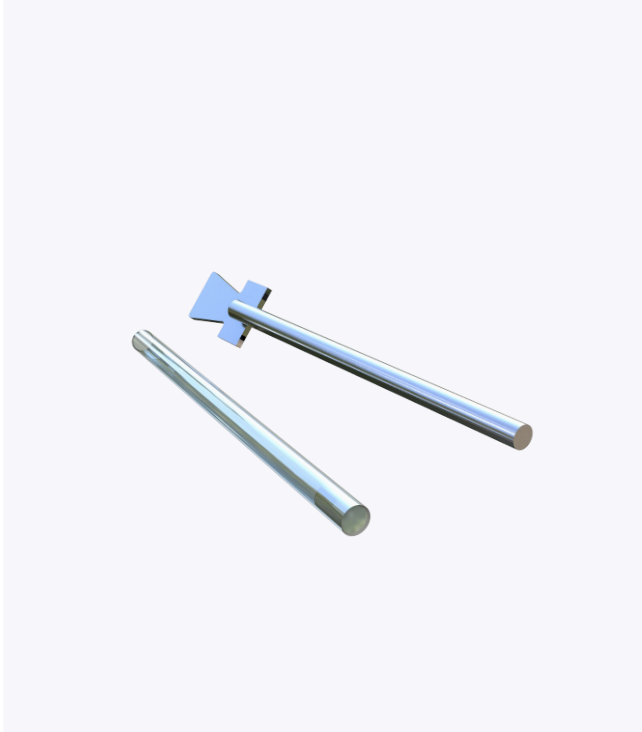

### Recycled Content:

#### Hot Dip Galvanized

85% Post-Consumer 10% Post-Industrial

### Material Conformance:

Designed to provide lateral shear resistance at the top of slab masonry walls, PTA tubes with expansion filler allow vertical slab movement without transferring compressive loads to the wall below. The tube is surrounded by mortar within the joint to ensure stability.

\*\*For Use in Dovetail Slot\*\*

Meets TMS 402/602 & ACI / ASCE 530 Building Code Requirements and Specification for Masonry Structures

Sheet Metal: ASTM A1008 / A1008M

Rod: ASTM A1064/A1064M

Hot dip galvanized after fabrication.

ASTM A153 / ASTM A153-B2 (1.5 oz/ft)



### Sizes/Finishes:

PTA-DT with 3/8" x 7" Rod with Tube &

Filler

Hot Dip Galvanized

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.

### NOTE

All information, data, and recommendations on this submittal are provided for general informational purposes only and do not constitute any warranty, guarantee, representation, or professional opinion. No reliance shall be placed on this information. Product selection, suitability, design, installation, and code compliance are the sole responsibility of the architect, engineer, design professional, and contractor. All Products are provided subject to 3GEN Masonry Products, Inc. Terms and Conditions of Sale, including all limitations, disclaimers, exclusive remedies, and indemnity obligations.

#### Mailing Address

8528 Davis Blvd., #134-246 North  
Richland Hills, TX 76182 Tel#:  
1-800-556-5785

**3genmp.com**

#### Warehouse Address

8550 Parkway Drive Leeds,  
AL 35094 Tel#:  
1-800-556-5785