


PRODUCT SUBMITTAL - PTA DOVETAIL

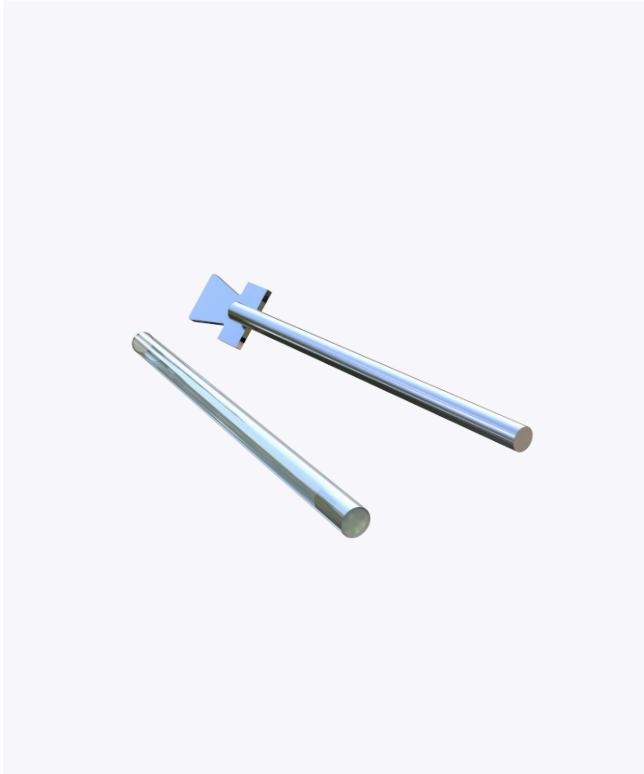

Recycled Content:

Hot Dip Galvanized

85% Post-Consumer 10% Post-Industrial

Material Conformance:

Designed to provide lateral shear resistance at the top of slab masonry walls, PTA tubes with expansion filler allow vertical slab movement without transferring compressive loads to the wall below. The tube is surrounded by mortar within the joint to ensure stability.

****For Use in Dovetail Slot****

Meets TMS 402/602 & ACI / ASCE 530 Building Code Requirements and Specification for Masonry Structures

Sheet Metal: ASTM A1008 / A1008M

Rod: ASTM A1064/A1064M

Hot dip galvanized after fabrication.

ASTM A153 / ASTM A153-B2 (1.5 oz/ft²)

Sizes/Finishes:

PTA-DT with 3/8" x 7" Rod with Tube &

Filler

Hot Dip Galvanized

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.

NOTE

The information provided herein is for general informational purposes only and does not constitute a professional opinion or engineering judgment. It is not intended to replace the design, detailing, or project-specific determinations of the licensed architect or engineer of record.

Each project is unique. The selection, application, suitability, and proper installation of these products are the sole responsibility of the design professional and installer based on project-specific conditions, substrate, exposure, and applicable codes.

All products and information referenced herein are subject to 3GEN Masonry Products, Inc.'s Terms and Conditions of Sale, including all limitations of liability, disclaimers of warranties, and exclusive remedies, as published and in effect at the time of sale.

Mailing Address

8528 Davis Blvd., #134-246 North
Richland Hills, TX 76182 Tel#:
1-800-556-5785

3genmp.com

Warehouse Address

8550 Parkway Drive Leeds,
AL 35094 Tel#:
1-800-556-5785