


## PRODUCT SUBMITTAL - TEK SCREWS

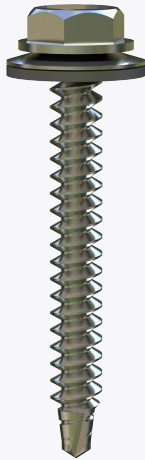

### Recycled Content::

85% Post-Consumer  
10% Post-Industrial

### Material Conformance:

The Tek Screws are used to secure veneer ties such as the H-10 & H-13 to the metal stud backup.

Recommended Spacing of anchor is 16" O.C

Wire: (Carbon Steel) ASTM A1064 / A1064M  
Tensile Strength: 80,000 psi. - Yield Point 70,000 psi.

Conforms to:  
ASTM C954  
ASTM B117

### Product Details:

Tek Screw Diameter: #10 with EPDM Washer

Tek Screw Length:

11/2"

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.

### NOTE

The information provided herein is for general informational purposes only and does not constitute a professional opinion or engineering judgment. It is not intended to replace the design, detailing, or project-specific determinations of the licensed architect or engineer of record.

Each project is unique. The selection, application, suitability, and proper installation of these products are the sole responsibility of the design professional and installer based on project-specific conditions, substrate, exposure, and applicable codes.

All products and information referenced herein are subject to 3GEN Masonry Products, Inc.'s Terms and Conditions of Sale, including all limitations of liability, disclaimers of warranties, and exclusive remedies, as published and in effect at the time of sale.

### Mailing Address

8528 Davis Blvd., #134-246 North  
Richland Hills, TX 76182 Tel#:  
1-800-556-5785

**3genmp.com**

### Warehouse Address

8550 Parkway Drive Leeds,  
AL 35094 Tel#:  
1-800-556-5785