



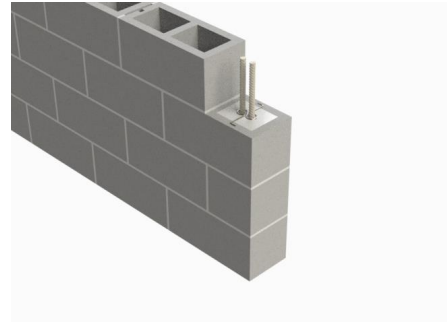



PRODUCT SUBMITTAL - REBAR POSITIONER

Rebar Positioners are used to properly locate the rebar in the cores of the CMU.

SINGLE REBAR POSITIONER

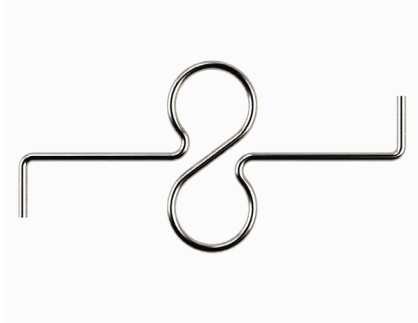

TWIN REBAR POSITIONER

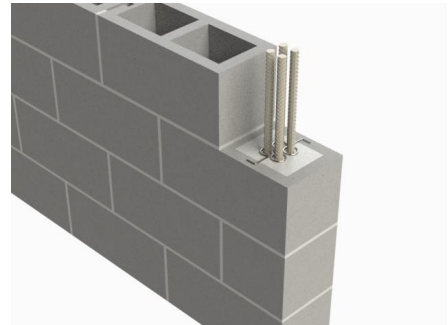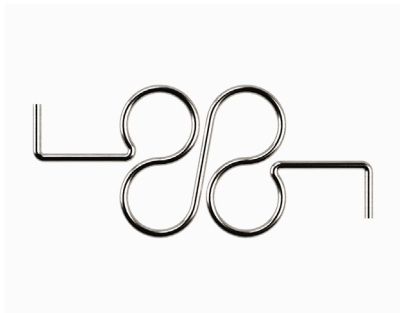

Recycled Content:

Hot Dip Galvanized

85% Post-Consumer, 10% Post-Industrial

Material Conformance

Rebar Positioners are used to properly locate the rebar in the cores of the CMU.

Wire: (Carbon Steel) ASTM A1064 / A1064M

Tensile Strength: 80,000 psi. - Yield Point 70,000 psi.

Hot Dip Galvanized after fabrication.

ASTM A153 / ASTM A153-B2 (1.5 oz/ft)

Product Details

Rebar Positioner Diameter: 9 gauge (.148")

Rebar Positioner Finish: Hot Dip Galvanized

Rebar Positioner CMU Size:

6" 8" 10" 12"

Rebar Twin Positioner CMU Size:

6" 8" 10" 12"

RESET EMAIL PRINT

NOTE

The information contained on this submittal sheet does not constitute any professional opinion or judgement and should not be used as a substitute for any architect or engineer professional determinations. Each construction project is unique and the use of these products is the responsibility of the architects, engineers and other professionals who are familiar with the specific design of the project.

Mailing Address

8528 Davis Blvd., #134-246
North Richland Hills, TX 76182
Tel#: 1-800-556-5785

3genmp.com

Warehouse Address

8550 Parkway Drive
Leeds, AL 35094
Tel#: 1-800-556-5785