



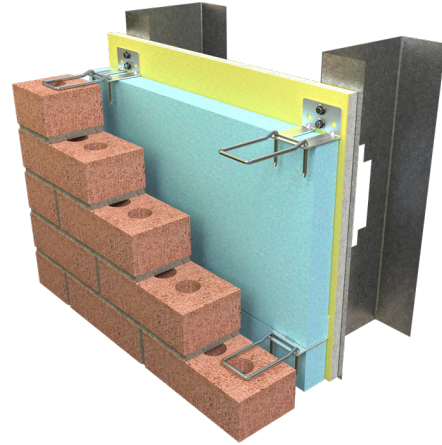

PRODUCT SUBMITTAL - H-13-H

The H-13-H veneer anchor is used for anchoring brick to metal stud, wood stud, concrete block or poured concrete.

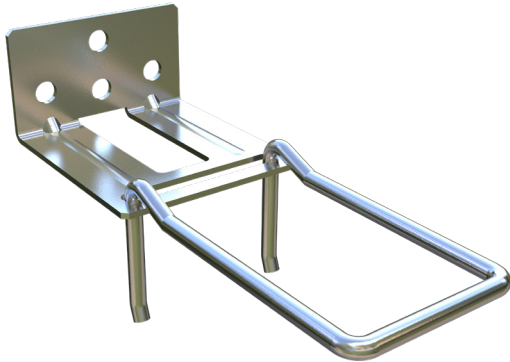

*****Anchor can be installed Horizontal or Vertical.*****

Recycled Content:

Mill Galvanized & Hot Dip Galvanized

85% Post-Consumer
10% Post-Industrial

Material Conformance

The H-13-H veneer anchor is used for anchoring brick to metal stud, wood stud, concrete block or poured concrete.
H-13-H can be used with rigid or spray foam insulation.
This anchor's multifunctional design allows for horizontal installation with a hook or vertical installation with a triangle.
Recommended Spacing is 16" O.C.
Meets TMS 402/602 & ACI / ASCE 530 Building Code Requirements and Specification for Masonry Structures
Sheet Metal: ASTM A1008 / A1008M
Wire: (Carbon Steel) ASTM A1064 / A1064M
Tensile Strength: 80,000 psi. - Yield Point 70,000 psi.
Hot Dip Galvanized after fabrication.
ASTM A153 / ASTM A153-B2 (1.5 oz/ft)

Structural Performance:

Capable of withstanding 100 lbs load in tension and compression without deforming or developing play in excess of .05 inch. (Test results available upon request)

Product Details

H-13 Finish: Hot Dip Galvanized
H-13 Material Thickness: 14 Gauge
Hook Diameter: 3/16"
Hook Finish: Hot Dip Galvanized
Insulation Thickness:
0" 1" 1 1/2" 2" 2 1/2" 3" 3 1/2"
4" 4 1/2"
3/16" Diameter Hook (Pintle) Length:
3" 4" 5" 6" 7"

RESET EMAIL PRINT

NOTE

The information contained on this submittal sheet does not constitute any professional opinion or judgement and should not be used as a substitute for any architect or engineer professional determinations. Each construction project is unique and the use of these products is the responsibility of the architects, engineers and other professionals who are familiar with the specific design of the project.

Mailing Address
8528 Davis Blvd., #134-246
North Richland Hills, TX 76182
Tel#: 1-800-556-5785

3genmp.com

Warehouse Address
8550 Parkway Drive
Leeds, AL 35094
Tel#: 1-800-556-5785