


PRODUCT SUBMITTAL - MESH TIE

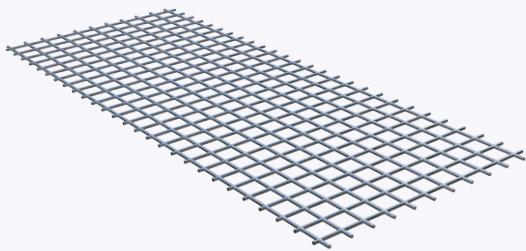

Recycled Content:

Hot Dip Galvanized

85% Post-Consumer

10% Post-Industrial

Material Conformance:

ASTM A185

ASTM A1064/A1064M - (Cold drawn steel wire)

ASTM A740 - (Hardware Cloth)

ASTM A951 Standard Specification for Steel Wire for Masonry Joint Reinforcement

Wire: (Carbon Steel) ASTM A1064 / A1064M 12" LONG
Tensile Strength: 80,000 psi. - Yield Point 70,000 psi.

Hot dip galvanized after fabrication

ASTM A153 / ASTM A153-B2 (1.5 oz/ft)

Sizes/Finishes:

Finishes:

16 GA. Hot Dip Galvanized

Wire Size:

8" LONG

12" LONG

100' LONG ROLLS

CMU / Block Size

4" 6" 8" 10" 12"

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.

NOTE

The information contained on this submittal sheet does not constitute any professional opinion or judgement and should not be used as a substitute for any architect or engineer professional determinations. Each construction project is unique and the use of these products is the responsibility of the architects, engineers and other professionals who are familiar with the specific design of the project.

Mailing Address

8528 Davis Blvd., #134-246 North
Richland Hills, TX 76182 Tel#:
1-800-556-5785

3genmp.com

Warehouse Address

8550 Parkway Drive Leeds,
AL 35094 Tel#:
1-800-556-5785