


PRODUCT SUBMITTAL - REBAR POSITIONER

Rebar Positioners are used to properly locate the rebar in the cores of the CMU.

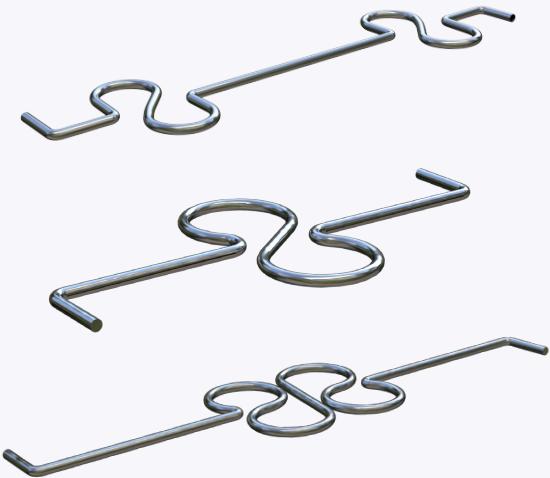

Recycled Content:

85% Post-Consumer 10% Post-Industrial

Material Conformance:

Rebar Positioners are used to properly locate the rebar in cores of the CMU.

Wire: (Carbon Steel) ASTM A1064 / A1064M

Tensile Strength: 80,000 psi. - Yield Point 70,000 psi.

Hot Dip Galvanized after fabrication.

ASTM A153 / ASTM A153-B2 (1.5 oz/

Product Details:

Rebar Positioner Diameter: 9 gauge (.148")

Rebar Positioner Finish: Hot Dip Galvanized

Rebar Positioner: Single Twin Rebar Twin Wide

Positioner CMU Size:

6" 8" 10" 12"

NOTE

The information contained on this submittal sheet does not constitute any professional opinion or judgement and should not be used as a substitute for any architect or engineer professional determinations. Each construction project is unique and the use of these products is the responsibility of the architects, engineers and other professionals who are familiar with the specific design of the project.

Mailing Address

8528 Davis Blvd., #134-246 North
Richland Hills, TX 76182 Tel#:
1-800-556-5785

3genmp.com

Warehouse Address

8550 Parkway Drive Leeds,
AL 35094 Tel#:
1-800-556-5785