


## PRODUCT SUBMITTAL - REBAR POSITIONER

Rebar Positioners are used to properly locate the rebar in the cores of the CMU.

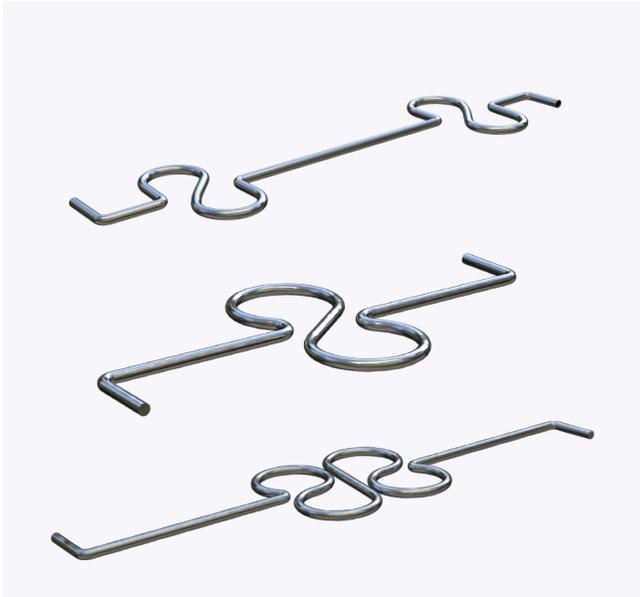

### Recycled Content:

85% Post-Consumer 10% Post-Industrial

### Material Conformance:

Rebar Positioners are used to properly locate the rebar in cores of the CMU.

Wire: (Carbon Steel) ASTM A1064 / A1064M

Tensile Strength: 80,000 psi. - Yield Point 70,000 psi.

Hot Dip Galvanized after fabrication.

ASTM A153 / ASTM A153-B2 (1.5 oz/

### Product Details:

Rebar Positioner Diameter: 9 gauge (.148")

Rebar Positioner Finish: Hot Dip Galvanized

**Rebar Positioner:**      Single      Twin Rebar      Twin Wide

**Positioner CMU Size:**

6"      8"      10"      12"

In order to email your submittal sheet information, you must have Adobe Acrobat installed on your computer.

### NOTE

All information, data, and recommendations on this submittal are provided for general informational purposes only and do not constitute any warranty, guarantee, representation, or professional opinion. No reliance shall be placed on this information. Product selection, suitability, design, installation, and code compliance are the sole responsibility of the architect, engineer, design professional, and contractor. All Products are provided subject to 3GEN Masonry Products, Inc. Terms and Conditions of Sale, including all limitations, disclaimers, exclusive remedies, and indemnity obligations.

#### Mailing Address

8528 Davis Blvd., #134-246 North  
Richland Hills, TX 76182 Tel#:  
1-800-556-5785

**3genmp.com**

#### Warehouse Address

8550 Parkway Drive Leeds,  
AL 35094 Tel#:  
1-800-556-5785